



# KELLY 5010 DX ELECTRIC



**EUROPEAN  
WARRANTY**

## MATERIAL:

- Vertical collectors in painted mild steel  $\varnothing$  38 mm.
- Horizontal heating elements in painted mild steel 50x10 mm.
- Heat transfer fluid.

## FIXING KIT:

Brackets, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick walls, user notice.

The kit is certified from TÜV in compliance with VDI 6036 - class 4.

## PACKAGING:

The radiator is protected by recyclable carton box. User notice included.

## PAINTING PROCESS:

Painted with ecological epoxy powders (Certificate DIN 55900-1,-2).

## COLOURS:

See colour chart.

## ACCESSORIES:

For the complete list, please refer to the accessories chapter.

### ELECTRICAL ONLY:

- With WiFi digital thermostat
- With PLUS digital thermostat
- With ECO digital thermostat

Class protection: CLASS 1

Minimum ingress protection: IP 44

Wire length: 1200 mm with Schuko plug (with WiFi or ECO digital thermostat)

Wire length: 800 mm with Schuko plug (with PLUS digital thermostat)

Power supply: 230Vac 50Hz (with WiFi or PLUS digital thermostat)

Power supply: 230Vac 50/60Hz (with ECO digital thermostat)


Seasonal energy efficiency  $\eta_s$ : 39% (with WiFi digital thermostat)

Seasonal energy efficiency  $\eta_s$ : 38% (with PLUS or ECO digital thermostat)

## CERTIFICATES



## HOW TO PLACE ELECTRIC RADIATORS

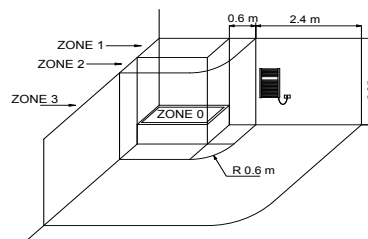

The national rules on installing electrical equipment in the bathroom must be scrupulously respected. The electric radiators must be always installed outside zone 1 and 2.

In particular the electric switch and control elements must be mandatorily located in zone 3, in order that no electrical control center is accessible to a anyone using the shower or bath.









All Cordivari electric radiators are in line with the new European regulation UE 2015/1188. The new regulation imposes a seasonal energy efficiency of electrical appliances for ambient heating with a nominal thermal output over 250 W and not less than 38%. Each of the ErP electric radiator is equipped with at least electronic temperature control, window opening detection and weekly programmer.

## INCLUDED




**Remote control of PLUS  
digital chrono-thermostat**

Remote control of PLUS  
digital chrono-thermostat  
functioning

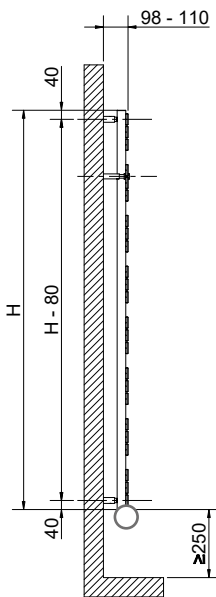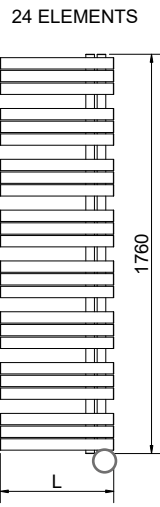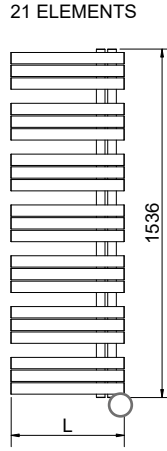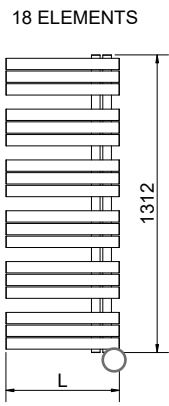

○ The general footprint has to be calculated considering the thermostat height




### KELLY 5010 DX ELECTRIC WIFI

NEW


Height [mm]	Width L [mm]	Art. nr.	Output [Watt]	Weight [Kg]
<b>864</b>	500	3581726100222	500	13
	600	3581726100223	600	15
<b>1312</b>	500	3581726100224	700	19
<b>1536</b>	500	3581726100226	900	23
<b>1760</b>	600	3581726100229	1200	26

PRODUCT AVAILABLE FROM APRIL 2022



### KELLY 5010 DX ELECTRIC PLUS (remote control included)

Height [mm]	Width L [mm]	Art. nr.	Output [Watt]	Weight [Kg]
<b>864</b>	500	3581726100190	500	13
	600	3581726100191	600	15
<b>1312</b>	500	3581726100192	700	19
<b>1536</b>	500	3581726100194	900	23
<b>1760</b>	600	3581726100197	1200	26



### KELLY 5010 DX ELECTRIC ECO

Height [mm]	Width L [mm]	Art. nr.	Output [Watt]	Weight [Kg]
<b>864</b>	500	3581726100171	500	13
	600	3581726100172	600	15
<b>1312</b>	500	3581726100173	700	19
<b>1536</b>	500	3581726100175	900	23
<b>1760</b>	600	3581726100178	1200	26

Art. nr. are referred to colour WHITE R01