



KELLY 5010 SX ELECTRIC



**EUROPEAN
WARRANTY**

MATERIAL:

- Vertical collectors in painted mild steel \varnothing 38 mm.
- Horizontal heating elements in painted mild steel 50x10 mm.
- Heat transfer fluid.

FIXING KIT:

Brackets, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick walls, user notice.

The kit is certified from TÜV in compliance with VDI 6036 - class 4.

PACKAGING:

The radiator is protected by recyclable carton box. User notice included.

PAINTING PROCESS:

Painted with ecological epoxy powders (Certificate DIN 55900-1,-2).

COLOURS:

See colour chart.

ACCESSORIES:

For the complete list, please refer to the accessories chapter.

ELECTRICAL ONLY:

- With WiFi digital thermostat
- With PLUS digital thermostat
- With ECO digital thermostat

Class protection: CLASS 1

Minimum ingress protection: IP 44

Wire length: 1200 mm with Schuko plug (with WiFi or ECO digital thermostat)

Wire length: 800 mm with Schuko plug (with PLUS digital thermostat)

Power supply: 230Vac 50Hz (with WiFi or PLUS digital thermostat)

Power supply: 230Vac 50/60Hz (with ECO digital thermostat)


Seasonal energy efficiency η_s : 39% (with WiFi digital thermostat)

Seasonal energy efficiency η_s : 38% (with PLUS or ECO digital thermostat)

CERTIFICATES



HOW TO PLACE ELECTRIC RADIATORS

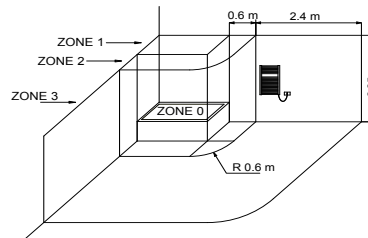

The national rules on installing electrical equipment in the bathroom must be scrupulously respected. The electric radiators must be always installed outside zone 1 and 2.

In particular the electric switch and control elements must be mandatorily located in zone 3, in order that no electrical control center is accessible to a anyone using the shower or bath.









All Cordivari electric radiators are in line with the new European regulation UE 2015/1188. The new regulation imposes a seasonal energy efficiency of electrical appliances for ambient heating with a nominal thermal output over 250 W and not less than 38%. Each of the ErP electric radiator is equipped with at least electronic temperature control, window opening detection and weekly programmer.

INCLUDED




**Remote control of PLUS
digital chrono-thermostat**

Remote control of PLUS
digital chrono-thermostat
functioning

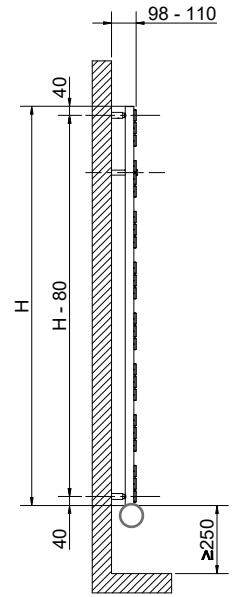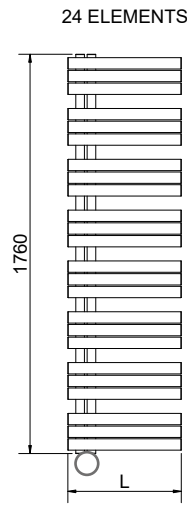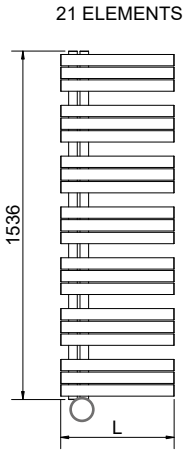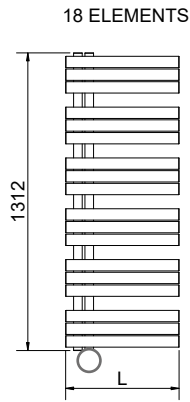

○ The general footprint has to be calculated considering the thermostat height




KELLY 5010 SX ELECTRIC WIFI

NEW


Height [mm]	Width L [mm]	Art. nr.	Output [Watt]	Weight [Kg]
864	500	3581726100230	500	13
	600	3581726100231	600	15
1312	500	3581726100232	700	19
1536	500	3581726100234	900	23
1760	600	3581726100237	1200	26

PRODUCT AVAILABLE FROM APRIL 2022



KELLY 5010 SX ELECTRIC PLUS (remote control included)

Height [mm]	Width L [mm]	Art. nr.	Output [Watt]	Weight [Kg]
864	500	3581726100198	500	13
	600	3581726100199	600	15
1312	500	3581726100200	700	19
1536	500	3581726100202	900	23
1760	600	3581726100205	1200	26



KELLY 5010 SX ELECTRIC ECO

Height [mm]	Width L [mm]	Art. nr.	Output [Watt]	Weight [Kg]
864	500	3581726100181	500	13
	600	3581726100182	600	15
1312	500	3581726100183	700	19
1536	500	3581726100185	900	23
1760	600	3581726100188	1200	26

Art. nr. are referred to colour WHITE R01