



LEILA ELECTRIC POLISHED STAINLESS STEEL



**EUROPEAN
WARRANTY**

MATERIAL:

- Vertical collectors in polished stainless steel \varnothing 30 mm.
- Horizontal elements in polished stainless steel \varnothing 18 mm.
- Heat transfer fluid.

FIXING KIT:

Brackets, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick walls, user notice.

The kit is certified from TÜV in compliance with VDI 6036 - class 4.

PACKAGING:

The radiator is protected by recyclable carton box. User notice included.

FEATURES:

It is totally made in stainless steel with an unalterable finishing guaranteed during the years.

ACCESSORIES:

For the complete list, please refer to the accessories chapter.

ELECTRICAL ONLY:

With TOP digital thermostat

Class protection: CLASS 1

Minimum ingress protection: IP 44

Wire length: 1200 mm with Schuko plug


Power supply: 230Vac 50/60Hz

Seasonal energy efficiency η_s : 38%

CERTIFICATES



HOW TO PLACE ELECTRIC RADIATORS

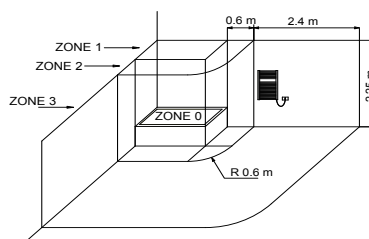

The national rules on installing electrical equipment in the bathroom must be scrupulously respected. The electric radiators must be always installed outside zone 1 and 2.

In particular the electric switch and control elements must be mandatorily located in zone 3, in order that no electrical control center is accessible to a anyone using the shower or bath.



All Cordivari electric radiators are in line with the new European regulation UE 2015/1188. The new regulation imposes a seasonal energy efficiency of electrical appliances for ambient heating with a nominal thermal output over 250 W and not less than 38%. Each of the ErP electric radiator is equipped with at least electronic temperature control, window opening detection and weekly programmer.

INCLUDED



Remote control of TOP digital chrono-thermostat


Remote control of TOP digital chrono-thermostat functioning

ACCESSORIES




Space-saving clothesline in plexiglass and steel

Width L	Art. nr.	L
370 mm	5991990310402	≤ 500 mm

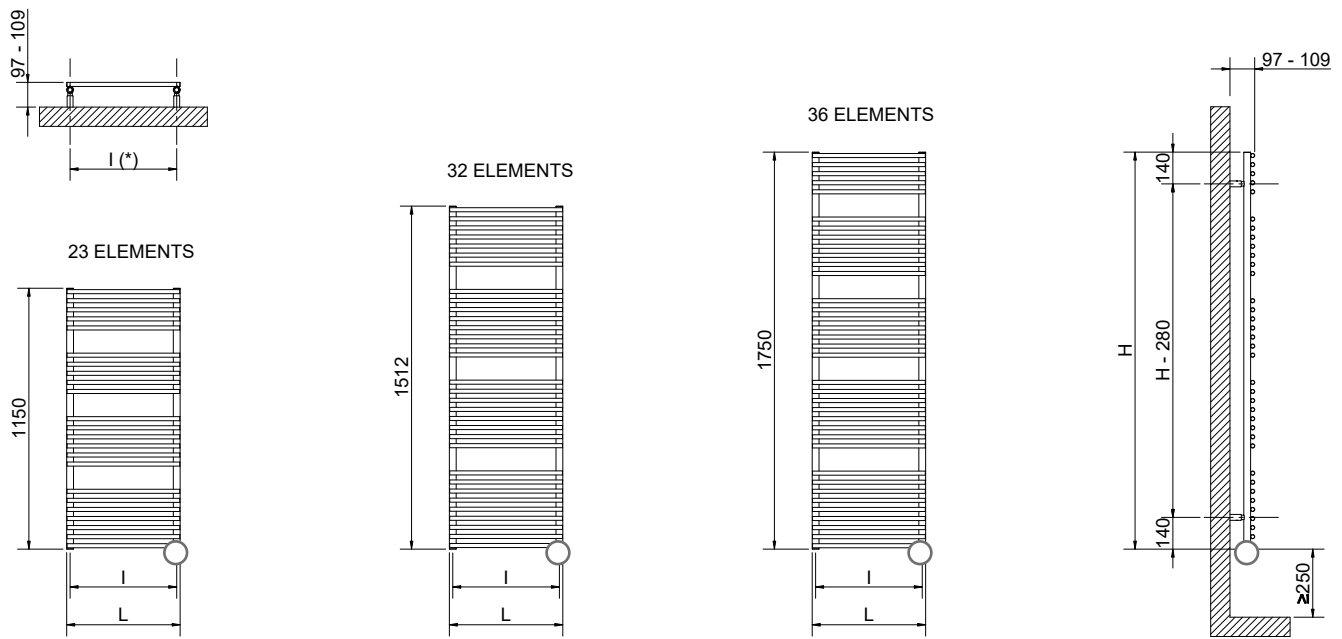

(*) Pipe center (l) measure of the fixing kit

○ The general footprint has to be calculated considering the thermostat height



LEILA ELECTRIC TOP (remote control included) - POLISHED STAINLESS STEEL

Height [mm]	Width L [mm]	Fixing kit center distance l (*)	Art. nr.	Output [Watt]	Weight [Kg]
1150	500	470	3581560400001	300	13,0
1512	500	470	3581560400002	500	18,0
1750	500	470	3581560400003	600	21,0