



LUCY 25

**EUROPEAN
WARRANTY**

MATERIAL:

- Vertical collectors in painted mild steel \varnothing 30 mm.
- Horizontal heating elements in painted mild steel \varnothing 25 mm.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, user notice.

The kit is certified from TÜV in compliance with VDI 6036 - class 4.

PACKAGING:

Carton angular and profiles protected by a recyclable film in polyethylene. User notice included.

PAINTING PROCESS:

Painted with ecological epoxy powders (Certificate DIN 55900-1,-2).

COLOURS:

See colour chart.

ACCESSORIES:

For the complete list, please refer to the accessories chapter.

AVAILABLE FUNCTIONS:

- Hot water
- Dual energy

P. max: 8 bar

Functioning: hot water

T. max: 110° C

Connections: n° 2 x 1/2" G - 1 x 1/2" G

CERTIFICATES




ACCESSORIES



Kristal valve square with thermostatic option white R01

Copper conn. \varnothing 12/14/15
Art. nr. 5991990311161

Multilayer conn. \varnothing 16
Art. nr. 5991990311160




Quotes for square Kristal valves with thermostatic option



Kristal valve square pipe centres 50 mm left white R01

Copper conn. \varnothing 12/14/15
Art. nr. 5991990311188

Multilayer conn. \varnothing 16
Art. nr. 5991990311187




Quotes for square Kristal valves with thermostatic option



Thermostatic head white

(Kit 2 pieces)


Art. nr. 5035270710016










Thermostatic head quotes

If ordered separately from the radiator, the accessories are available in standard white only

Art. nr. are referred to colour WHITE R01



Detail of the pipe centres 50 mm version

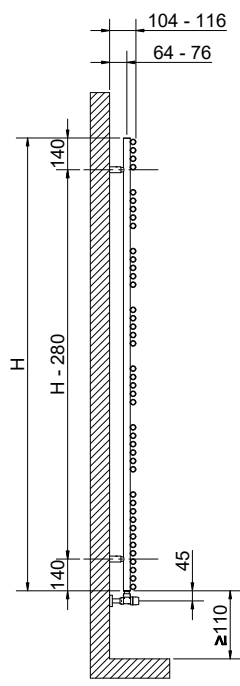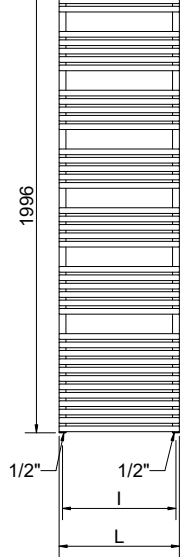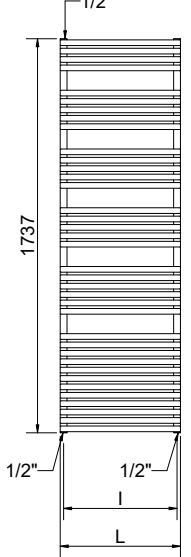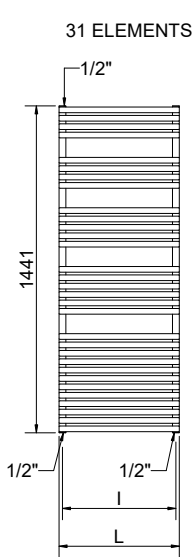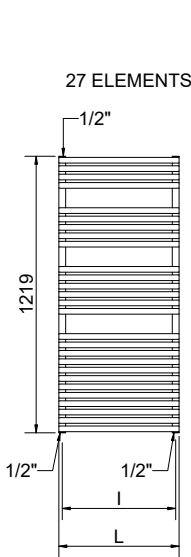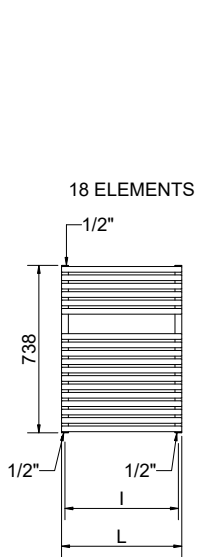

(*) The fixing kit has the same pipe centre (l) as the radiator

Quotes for Kristal valves

LUCY 25

Height [mm]	Width L [mm]	Pipe centres l [mm]	Art. nr.	Pipe centres 50 mm		Thermal output [Watt]				Dual energy kit [Watt]	
				Art. nr.		Dry Weight [Kg]	Surface [m ²]	Water content [lt]	Δt=50°C		Δt=30°C
738	430	400	3551406100340	3551406100360	5,8	0,747	4,1	410	224	1,1862	400
	480	450	3551406100344	3551406100364	6,4	0,818	4,5	449	244	1,1956	400
	430	400	3551406100341	3551406100361	9,0	1,142	6,3	605	317	1,2664	600
1219	480	450	3551406100345	3551406100365	9,8	1,248	6,8	661	353	1,2289	600
	530	500	3551406100348	3551406100368	10,6	1,354	7,4	717	369	1,3021	700
	580	550	3551406100352	3551406100372	11,4	1,460	8,0	773	395	1,3127	700
1441	430	400	3551406100342	3551406100362	10,4	1,319	7,3	685	366	1,2255	700
	480	450	3551406100346	3551406100366	11,3	1,440	7,9	748	398	1,2346	700
	530	500	3551406100349	3551406100369	12,2	1,562	8,6	812	435	1,2229	700
1737	580	550	3551406100353	3551406100373	13,1	1,684	9,2	875	465	1,2378	900
	430	400	3551406100343	3551406100363	12,4	1,577	8,7	788	422	1,2236	700
	480	450	3551406100347	3551406100367	13,5	1,722	9,5	861	458	1,2354	900
1996	530	500	3551406100350	3551406100370	14,6	1,868	10,2	933	493	1,2482	900
	580	550	3551406100354	3551406100374	15,7	2,013	11,0	1006	531	1,2493	1000
	530	500	3551406100351	3551406100371	16,6	2,125	11,6	1041	392	1,9114	1000
1996	580	550	3551406100355	3551406100375	17,8	2,289	12,5	1121	605	1,2078	1000
	730	700	3551406100356	3551406100376	21,6	2,784	15,1	1364	729	1,2264	1200

Art. nr. are referred to colour WHITE R01

For output at different ΔT, please refer to the following formula: desired output = output at ΔT 50 x (desired Δt/50)ⁿ