

ELEN 22

POLISHED STAINLESS STEEL

WARRANTY 10 YEARS



MATERIAL:

- Ø 30 mm vertical collectors in polished stainless steel.
- Ø 18 mm horizontal elements in polished stainless steel.

FIXING KIT:

Brackets, hex key, airvent, dowels and screws suitable for use on solid walls or perforated bricks, assembly instructions.
The fixing kit is compliant with VDI 6036 norm, class 4.

PACKAGING:

Cardboard angular and profiles protected by a recyclable film in polyethylene.
User notice included.

FEATURES:

It is totally made in stainless steel with an unalterable finishing guaranteed during the years.

CERTIFICATES



FEATURES

P. max: 8 bar

T. max: 110°C

Functioning: hot water

Connections: n° 2 x 1/2" G - 1 x 1/2" G

AVAILABLE FUNCTIONS

- Hot water
- Dual energy

AVAILABLE ACCESSORIES



Kristal valve angled with thermostatic option chromed




Kristal valve corner Right or Left with thermostatic option chromed




Thermostatic head Kristal TC chromed

Complete list, codes and details of the ACCESSORIES



Detail of the 50 mm pipe-centres version.

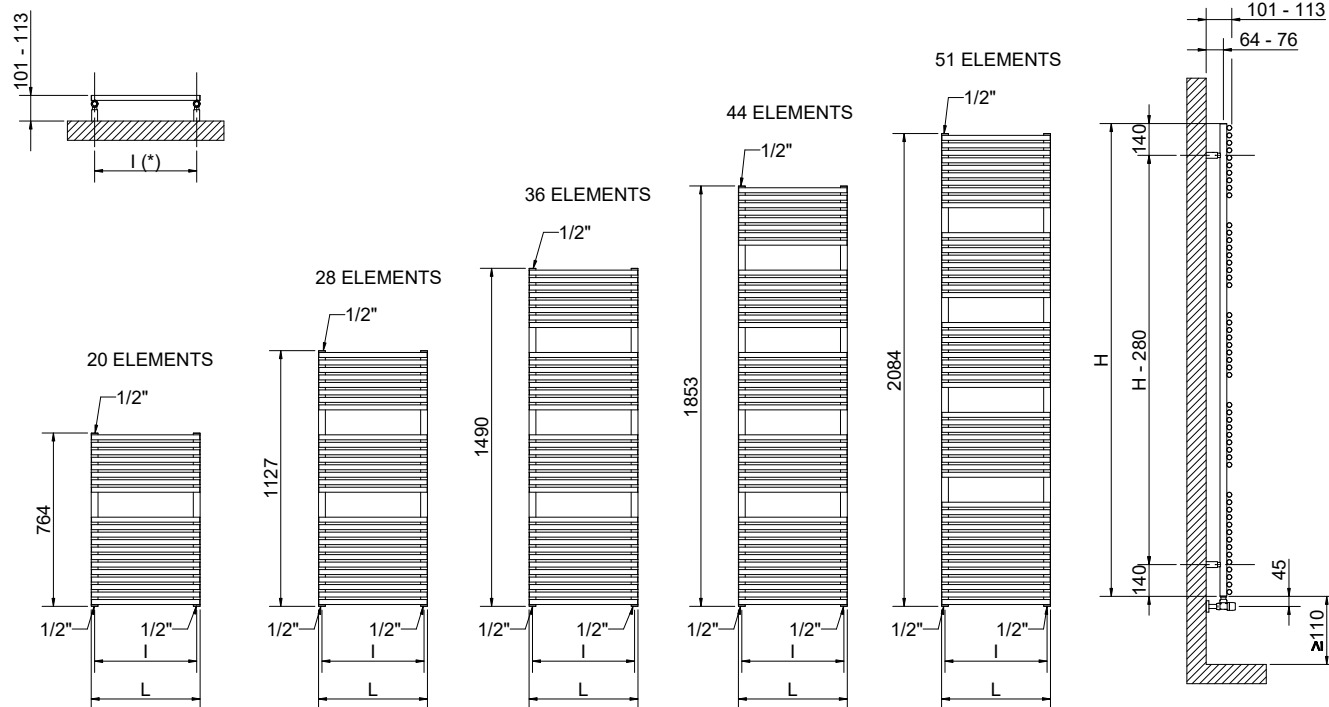

(*) The fixing kit has the same pipe centre (l) as the radiator

Quotes for Kristal valves

ELEN 22 POLISHED STAINLESS STEEL

PIPE CENTRES 50 mm

Height [mm]	Width L [mm]	Pipe Centres		Art. nr.	Art. nr.	Thermal output					
		l [mm]	Art. nr.			Dry Weight [Kg]	Surface [m ²]	Water content [lt]	Δt 50°C [Watt]	Δt 30°C [Watt]	Exp. n
764	430	400	3551440133080	3551440133110	5,8	0,74	3,62	276	147	1,2334	-
	480	450	3551440133085	3551440133114	6,3	0,81	3,93	305	163	1,2248	300
1127	430	400	3551440133081	3551440133111	8,2	1,04	5,13	387	206	1,2348	400
	480	450	3551440133086	3551440133115	8,9	1,14	5,57	426	228	1,2265	400
	530	500	3551440133091	3551440133119	9,6	1,24	6,01	466	250	1,2181	400
	580	550	3551440133096	3551440133123	10,3	1,33	6,45	505	272	1,2098	500
1490	430	400	3551440133082	3551440133112	10,6	1,35	6,65	503	268	1,2289	500
	480	450	3551440133087	3551440133116	11,5	1,48	7,21	553	296	1,2233	500
	530	500	3551440133092	3551440133120	12,4	1,60	7,78	604	324	1,2178	600
	580	550	3551440133097	3551440133124	13,4	1,72	8,34	654	352	1,2122	600
1853	430	400	3551440133083	3551440133113	13,0	1,66	8,16	628	338	1,2147	600
	480	450	3551440133088	3551440133117	14,1	1,81	8,85	689	371	1,2123	700
	530	500	3551440133093	3551440133121	15,2	1,96	9,54	750	404	1,2099	700
	580	550	3551440133098	3551440133125	16,4	2,11	10,23	811	438	1,2076	700
2084	480	450	3551440133089	3551440133118	16,2	2,08	10,18	781	422	1,2053	700
	530	500	3551440133094	3551440133122	17,6	2,26	10,99	849	459	1,2049	700
	580	550	3551440133099	3551440133126	18,9	2,44	11,79	917	496	1,2046	900
	730	700	3551440133104	3551440133127	22,9	2,97	14,19	1122	606	1,2037	1000

For output at different ΔT , please refer to the following formula: desired output = output at ΔT 50 x (Desired $\Delta T/50$)ⁿ