

LISA[®] 25

CURVED CHROMED



EURO NORM
EN 442-1
RADIATORS AND CONVECTORS

EUROPEAN
WARRANTY



AVAILABLE FUNCTIONS:

- Hot water**
- Dual energy** (see Cordivari Radiators and Towel Rails catalogue)

Material:

- Vertical collectors in mild steel semi oval 30x40 mm.
- Curved horizontal heating elements in mild steel \varnothing 25 mm.

Fixing kit:

The fixing kit is in compliance with norm VDI 6036, that guarantees maximum resistance, security and stability of the towel rail. Each kit includes brackets, airvent, hexagonal tool, plugs and screws suitable for use on either compact or hollow brick walls. For a correct assembly always refer to the user manual supplied.

Max pressure: **8 bar**

Functioning: **Hot water**

Max temperature: **110° C**

Connections: **n° 2 x 1/2" G - 1 x 1/2" G**

Packing:

Carton angular and profiles protected by a recyclable film in polyethylene. User notice included.

Finishing:

Chrome (PLATED IN ITALY).



ACCESSORIES

For Accessories range see Accessories chapter




CHROMED
VALVE KIT




KIT 2 HOOKS
CHROMED

For information about Kristal valves, see Radiators and Towel Rails Catalogue

Art. nr. 5991990310303



Detail of the 50 mm pipe centres version.

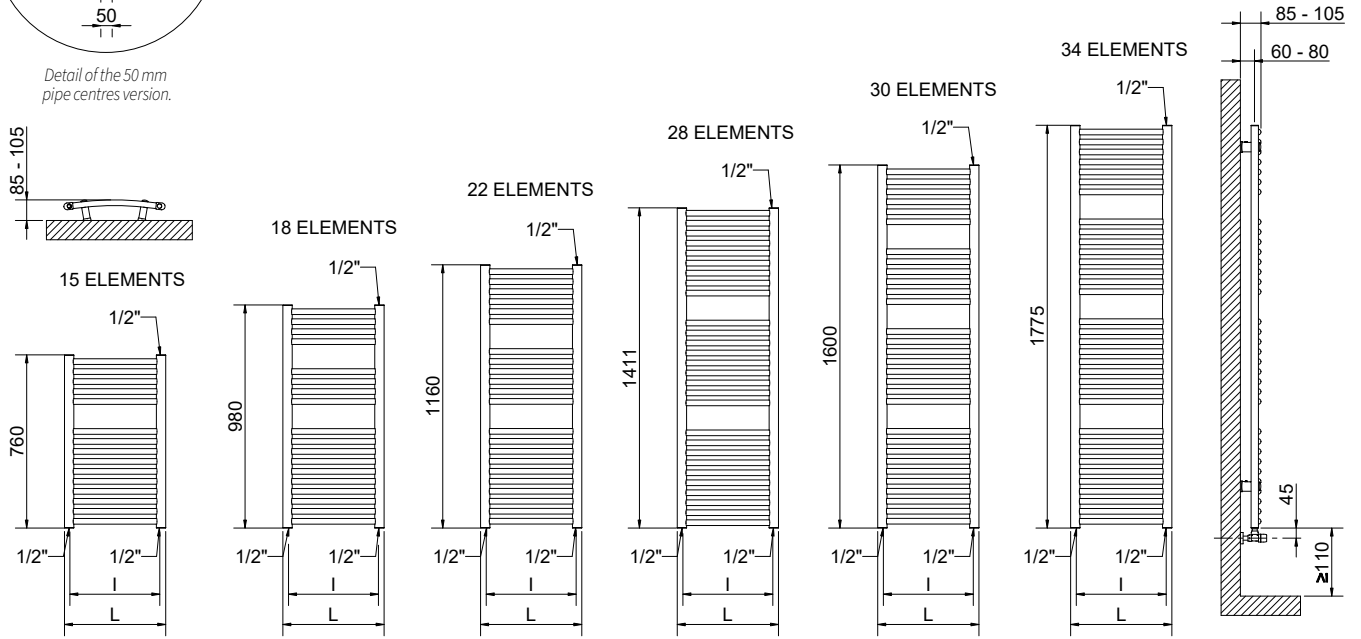

LISA® 25 CURVED CHROMED

Height [mm]	Width L [mm]	Pipe Centres l [mm]	Art. nr.	PIPE CENTRES 50 mm		Dry weight [Kg]	Surface [m²]	Water content [lt]	Thermal output [Watt]		Exponent [n]	Dual energy kit [Watt]
				Art. nr.					Δt=50°C	Δt=30°C		
760	450	400	3551586110302	3551586110352		5,6	0,62	3,7	232	124	1,2235	-
	500	450	3551586110303	3551586110353		6,0	0,68	4,0	254	136	1,2218	-
	550	500	3551586110304	3551586110354		6,4	0,74	4,3	275	147	1,2204	-
980	600	550	3551586110305	3551586110355		6,9	0,80	4,6	296	158	1,2192	300
	450	400	3551586110309	3551586110359		6,8	0,77	4,6	285	153	1,2116	300
	500	450	3551586110310	3551586110360		7,4	0,84	4,9	313	168	1,2156	300
1160	550	500	3551586110311	3551586110361		7,9	0,91	5,3	340	182	1,2133	300
	600	550	3551586110312	3551586110362		8,4	0,98	5,7	367	197	1,2087	300
	450	400	3551586110316	3551586110366		8,2	0,93	5,5	330	174	1,2448	300
1411	500	450	3551586110317	3551586110367		8,9	1,02	6,0	362	191	1,2427	300
	550	500	3551586110318	3551586110368		9,5	1,10	6,4	394	209	1,2410	400
	600	550	3551586110319	3551586110369		10,2	1,19	6,9	426	226	1,2378	400
1600	450	400	3551586110323	3551586110373		10,2	1,69	6,9	397	207	1,2666	400
	500	450	3551586110324	3551586110374		11,1	1,27	7,5	436	229	1,2595	400
	550	500	3551586110325	3551586110375		11,9	1,38	8,1	475	249	1,2592	500
1775	600	550	3551586110326	3551586110376		12,7	1,49	8,6	513	270	1,2537	500
	450	400	3551586110330	3551586110380		11,2	1,27	7,6	451	235	1,2699	500
	500	450	3551586110331	3551586110381		12,1	1,39	8,2	495	259	1,2660	500
1775	550	500	3551586110332	3551586110382		13,0	1,51	8,8	539	282	1,2628	500
	600	550	3551586110333	3551586110383		13,9	1,63	9,4	582	305	1,2600	600
	450	400	3551586110337	3551586110387		12,6	1,43	8,5	505	270	1,2209	500
1775	500	450	3551586110338	3551586110388		13,6	1,57	9,2	553	297	1,2128	500
	550	500	3551586110339	3551586110389		14,6	1,71	9,9	601	323	1,2107	600
	600	550	3551586110340	3551586110390		15,6	1,83	10,6	649	349	1,2089	600

For output at different Δt than 50°C, please refer to the following formula: **desired output = output at Δt 50°C x (desired Δt/50)ⁿ**