

BOLLY® PRIMO

POLYWARM® COATED CALORIFIER FOR D.H.W. PRODUCTION

WITH 1 FIXED HEAT EXCHANGER FOR WALL OR FLOOR STANDING INSTALLATION



APPLICATION

Production and storage of domestic hot water (DHW).

MATERIAL

Mild steel Polywarm® coated (Attestation ACS - SSICA - EN 16421 - WRAS).

HEAT EXCHANGER:

Mild steel Polywarm® coated heat exchanger.

INSULATION

High thermal insulation with ecological polyurethane hard foam

Grey PVC external lining.

CATHODE PROTECTION

Magnesium anode.

DRAIN


External confluence through drain connection (versione verticale).

WARRANTY

2 years (See general sales conditions and warranty)

ACCESSORIES AND SPARE PARTS

See Accessories section for the entire list.



POLYWARM®
COATED
DHW STORAGE

POLYWARM®
COATED
HEAT EXCHANGER



BOLLY® PRIMO WB



HEAT EXCHANGER SURFACE ENERGY EFFICIENCY CLASS

HARD FOAM INSULATION

Model	Pallet Art. Nr.	PIECES per pallet	[m²]	
100	310416090005606	6	0,44	C
150	310416090005706	6	0,63	C
200	310416090005804	4	0,84	C
300	310416090005904	4	1,22	C

Model	Output	Ignition time	Production of D.H.W.	
	[kW]	[min]	[lt/h]	[lt/10']
100	14	32	345	200
150	21	33	508	298
200	29	32	704	403
300	42	34	1027	599

Data have been calculated with primary water at 85 °C - DHW production from 10°C to 45°C, and storage at 60 °C

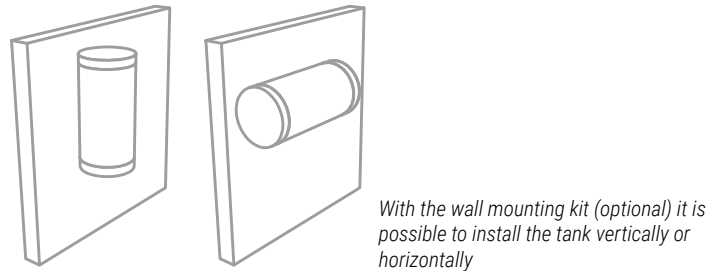

ACCESSORIES

Wall fixing kit

ART. NR.	For model
5221000000069	100
5221000000070	150
5221000000071	200
5221000000072	300

Galvanized brackets +PVC bottom cover

Electric immersion heater with thermostat

Art. Nr.	Output	Connection
5240000000051	1,5 kW	1"1/2
5240000000052	2 kW	1"1/2
5240000000053	3 kW	1"1/2

Thermometer

Art. Nr.
5032240000107
5 units box

Magnesium anode



ART. NR.	Model
5200000041015	100÷150
5200000041010	200÷300
2 units box	

BOLLY® PRIMO




POLYWARM® COATED CALORIFIER FOR D.H.W. PRODUCTION

WITH 1 FIXED HEAT EXCHANGER FOR WALL OR FLOOR STANDING INSTALLATION

STORAGE		HEAT EXCHANGER	
Pmax	Tmax	Pmax	Tmax
10 bar	90 °C	12 bar	110 °C

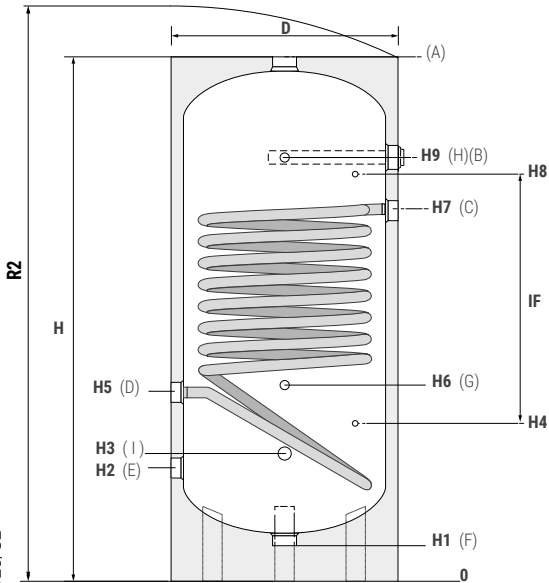

Centre-to-centre distance for installation on wall (optional)

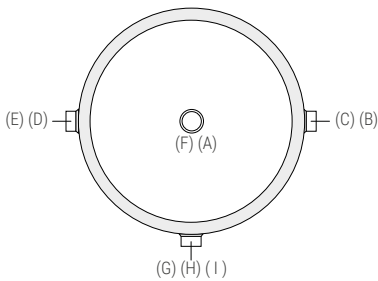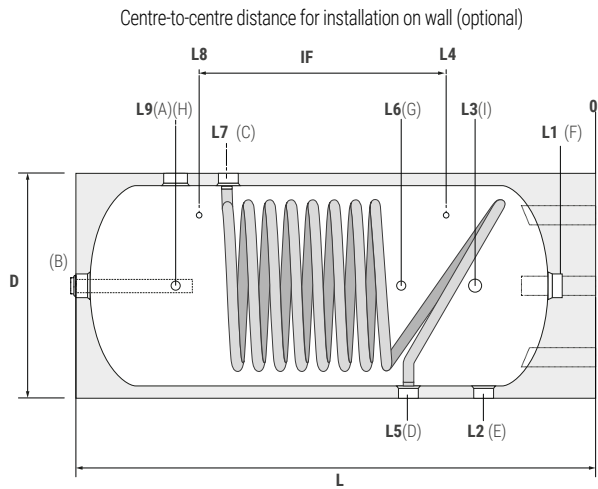

- A** Domestic hot water outlet 1"1/4 G F
- B** Magnesium anode 1"1/4 G F
- C** Primary circuit inlet 1" G F
- D** Primary circuit outlet 1" G F
- E** Domestic cold water circuit inlet 1"1/4 G F
- F** Connection 1"1/4 G F
- G** Instrumentation 1/2" G F
- H** Instrumentation 1/2" G F
- I** Connection for electric immersion heater 1"1/2 G F

Model	Volume	Weight	DE	R1	H/L	H1/L1	H2/L2	H3/L3	H4/L4	H5/L5	H6/L6	H7/L7	H8/L8	H9/L9	IF
	[lt]	[kg]													
100	103	29	456	1130	1025	72	276	286	294	371	411	726	804	821	510
150	149	40	456	1410	1330	72	276	286	401	371	411	1101	1071	1196	570
200	191	47	510	1450	1350	69	283	293	386	378	418	1108	1101	1203	730
300	293	62	610	1535	1400	70	310	320	413	405	445	1135	1128	1230	730

P.E.D. product designed and produced in conformity to the article 4.3 of directive 2014/68/UE - ErP Ecodesign directive 2009/125/CE

BOLLY® MURALE - BOLLY® PRIMO


HEAT EXCHANGERS TECHNICAL DATA



Data have been calculated on following basis:

- 1) Primary circuit at T1 and proper energy source;
- 2) Production of DHW in continuous from 10 °C to t2;
- 3) DHW that can be taken in the first 10' and in the first hour from storage at t2, input 10 °C and output 45 °C;
- 4) Non-scaling sanitary water



Model	Primary flow rate [m³/h]	Ignition time (minutes) from 10 °C to t2 and primary at T1				Maximum power exchange (kW) with primary at T1, secondary within 10-45 °C and constant use of DHW production				DHW continuous production lt/h within 10-45 °C and primary at T1			
		T1/t2				T1				T1			
		55/50	65/60	70/60	80/60	55	65	70	80	55	65	70	80
80	2	80	85	55	35	4,9	7,3	8,6	11,2	114	175	207	270
	1	90	96	61	39	4,5	6,7	7,9	10,2	105	160	188	245
100	2	99	105	68	43	4,9	7,3	8,6	11,2	114	175	207	270
	1	111	119	76	48	4,5	6,7	7,9	10,2	105	160	188	245
150	2	105	111	74	47	6,5	9,7	11,3	14,7	154	234	275	358
	1	119	126	84	54	6	8,8	10,3	13,2	141	218	248	322
200	2,5	91	95	65	42	9,2	13,8	16,2	21	223	337	395	513
	1,25	102	108	73	48	8,6	12,7	14,7	19	206	308	359	464
300	3	98	102	70	46	13,1	19,6	22,9	29,6	318	479	561	727
	1,5	110	115	80	52	12,2	17,9	20,8	26,7	296	438	510	656



Model	Primary flow rate [m³/h]	DHW produced in the first 10 minutes in lt/10' input 10 °C output 45 °C, storage at t2 and primary at T1				DHW produced in the first hour in lt/60' input 10 °C output 45 °C, storage at t2 and primary at T1				Heat exchanger pressure drop	
		T1/t2				T1/t2				[mmH ₂ O]	[mbar]
		55/50	65/60	70/60	80/60	55/50	65/60	70/60	80/60		
80	2	110	143	149	159	183	254	280	330	175	17
	1	109	141	146	155	175	242	265	310	51	5
100	2	133	172	177	188	205	283	308	359	175	17
	1	132	170	174	184	198	271	293	339	51	5
150	2	191	246	253	267	289	394	427	494	229	22
	1	189	243	248	261	279	382	406	465	67	7
200	2,5	249	320	330	350	390	534	580	675	472	46
	1,25	246	316	324	342	376	511	551	635	139	14
300	3	379	487	501	528	580	790	856	989	908	89
	1,5	375	480	492	516	563	758	815	932	268	26

HEAT EXCHANGERS PRESSURE DROP

Heat exchangers surface [m²]	
80	0,44
100	0,44
150	0,63
200	0,84
300	1,22

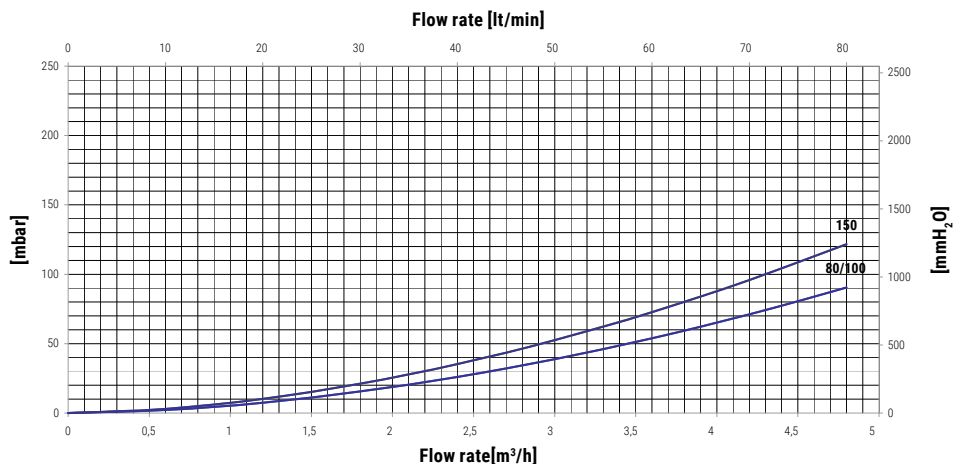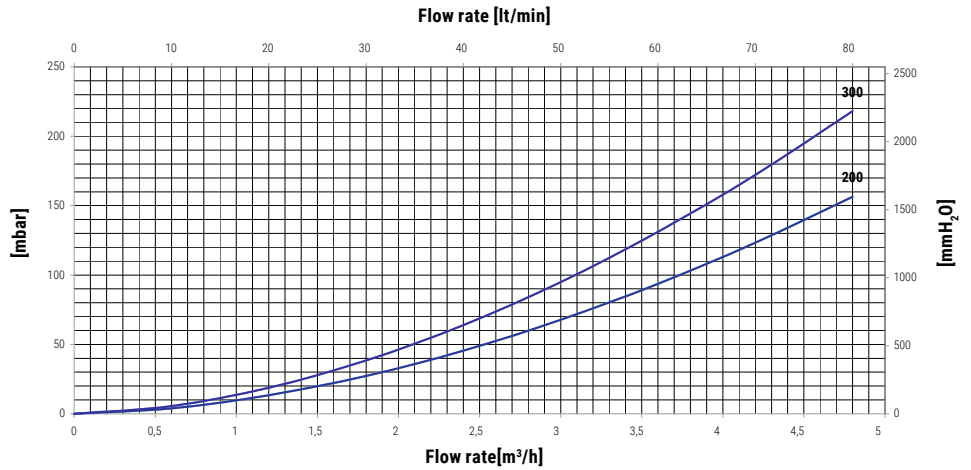


BOLLY® MURALE - BOLLY® PRIMO

HEAT EXCHANGERS TECHNICAL DATA




Heat Exchanger output referred to temperature and flow rate of primary circuit and with secondary at 10/45°C at maximum withdrawal of producible DHW (Upper limit of the curves referred to maximum primary flow rate in the heat exchanger, while the lower limit in the curves refer to the minimum primary flow rate)

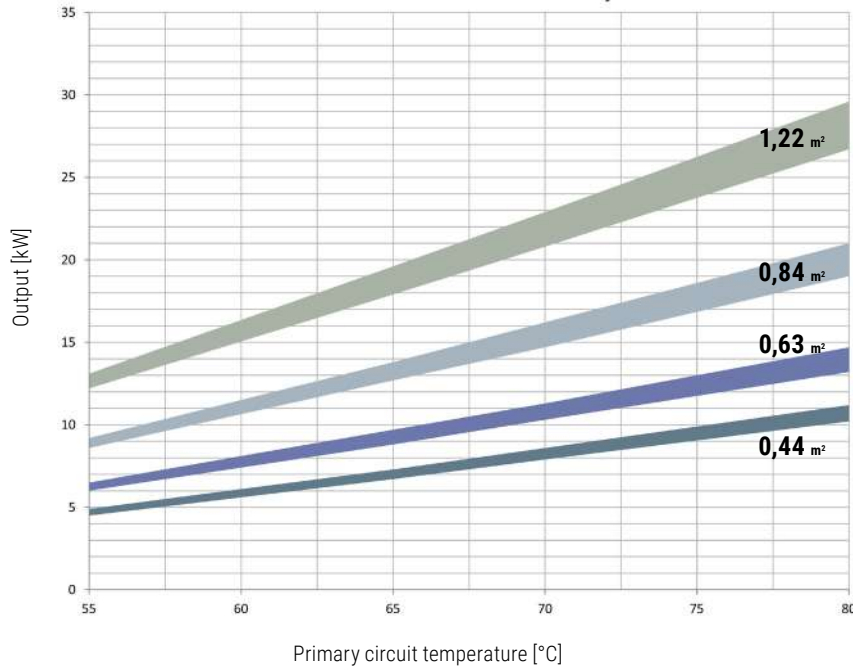

Heat exchanger [m²]	0,44		0,63		0,84		1,22	
Flow rate [m³/h]	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN
	2	1	2	1	2,5	1,25	3	1,5

EXAMPLE OF INSTALLATION WITH BOLLY® MURALE

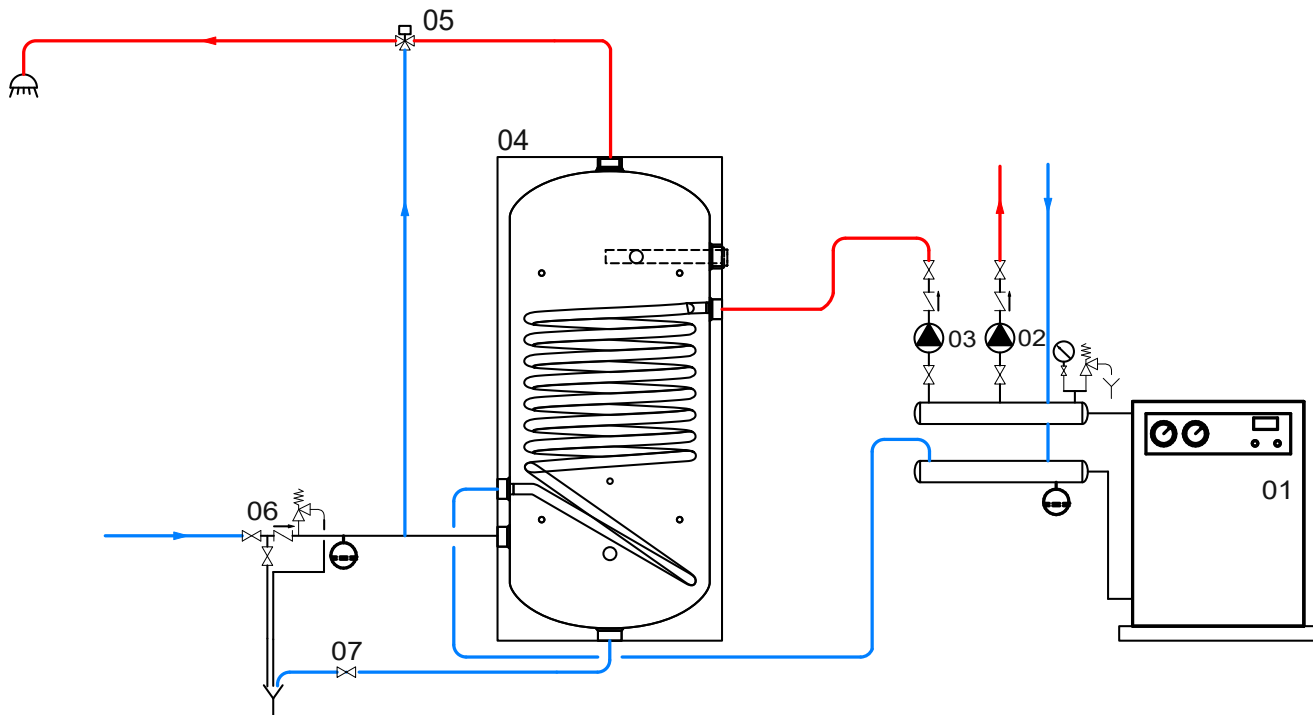

01	Generator	03	D.H.W. circulation group	05	Thermostatic mixing valve	07	Blowdown valve
02	Heating system circulation group	04	Bolly Murale	06	Hydraulic safety group		