

COMBI 3 INOX

MULTI-HEAT ENERGY BUFFER WITH STAINLESS STEEL 316L TANK IN TANK CALORIFIER AND 2 FIXED HEAT EXCHANGERS



APPLICATION

Heating hot water storage and D.H.W. production.

MATERIAL

Buffer tank: Mild steel, painted externally and untreated internally.

D.H.W. storage: Stainless steel 316L suitable for D.H.W.

HEAT EXCHANGERS:

Nr. 2 fixed heat exchangers.

TECHNICAL DESCRIPTION

Multi-Heat Energy tanks Combi 3 are used in units with a typically discontinuous energy source for double use: heating systems and domestic hot water systems.

INSULATION

High thermal insulation with ecological polyurethane hard foam.

Grey PVC external lining.

CATHODE PROTECTION

Chain magnesium anode

WARRANTY

5 years (See general sales conditions and warranty)

ACCESSORIES AND SPARE PARTS


See Accessories section for the entire list.




316L
STAINLESS STEEL
DHW STORAGE



COMBI 3 XB


Model	HARD FOAM INSULATION	STAINLESS STEEL 316L DHW STORAGE		UPPER HEAT EXCHANGER		LOWER HEAT EXCHANGER		ENERGY EFFICIENCY CLASS 
		Volume	Surface	Volume	Surface	Volume	Surface	
500	Art. Nr. 3270162314251	99	1,1	8	1,3	11,5	1,9	C
600	Art. Nr. 3270162314252	146	1,3	12	1,9	18	2,8	C




Model	DISMOUNTABLE HARD FOAM INSULATION	STAINLESS STEEL 316L DHW STORAGE		UPPER HEAT EXCHANGER		LOWER HEAT EXCHANGER		ENERGY EFFICIENCY CLASS 
		Volume	Surface	Volume	Surface	Volume	Surface	
800	Art. Nr. 3270162314253	191	1,6	16	2,4	20	3,1	C
1000	Art. Nr. 3270162314254	226	1,8	20	3,1	24	3,7	C

ACCESSORIES


Thermometer

Art. Nr.	
5032240000107	
5 units box	

Chain magnesium anode (Connection 3/4")

Art. Nr.	For models	
5200000041007	800,1000	
5200000041016	500,600	
N° 2 chain anodes + insulated cap + gasket		



Buffer tanks connecting kit

Art. Nr.	Connection	
5006170001001	1" 1/2	
Stainless steel extensible connecting kit - (200 ÷ 400 mm)		


COMBI 3 INOX

MULTI-HEAT ENERGY BUFFER WITH STAINLESS STEEL 316L TANK IN TANK CALORIFIER AND 2 FIXED HEAT EXCHANGERS

TECHNICAL STORAGE		D.H.W. STORAGE		FIXED HEAT EXCHANGER	
Pmax	Tmax	Pmax	Tmax	Pmax	Tmax
3 bar	99 °C	6 bar	95 °C	12 bar	110 °C

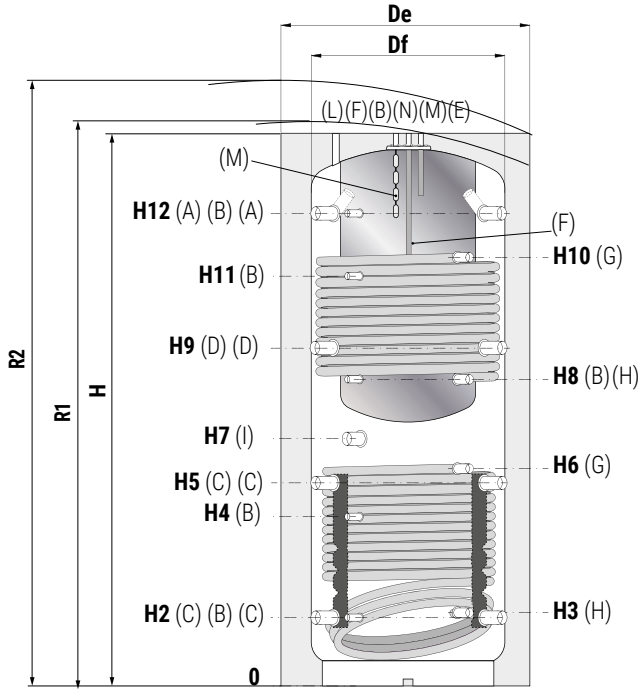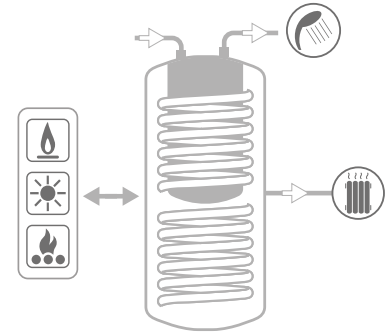

- A** Heating delivery/From generator 1"1/2 G F
- B** Connection for instrumentation 1/2" G F
- C** Heating return/to generator 1"1/2 G F
- D** Heating delivery 1"1/2 G F
- E** Domestic hot water outlet 3/4" G F
- F** Domestic cold water circuit inlet 3/4" G F
- G** Fixed heat exchanger inlet 1" G F
- H** Fixed heat exchanger outlet 1" G F
- I** Connection for electric immersion heater 1"1/2 G F
- L** Air purge 1/2" G F
- M** Connection for magnesium anode 3/4" G F
- N** Recirculation 3/4" G F

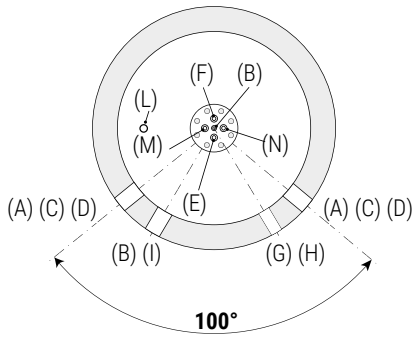

Model	Volume [lt]	Weight [kg]	Df	De	H	R1	R2	H2	H3	H4	H5	H6	H7	H8	H9	H10	H11	H12
			[mm]															
500	478	120	//	750	1650	//	1820	247	260	533	629	744	841	940	1011	1231	1231	1343
600	560	150	//	750	1900	//	2050	247	260	582	695	855	915	1060	1144	1500	1382	1593
800	805	198	790	950	1855	2030	2090	265	278	584	690	762	823	988	1115	1428	1332	1541
1000	946	240	790	950	2160	2310	2370	265	284	656	787	953	998	1188	1309	1748	1588	1831

P.E.D. product designed and produced in conformity to the article 4.3 of directive 2014/68/UE - ErP Ecodesign directive 2009/125/CE

COMBI 3 INOX


D.H.W. STORAGE PERFORMANCES



Model	COMPLETE HEATED STORAGE VOLUME				UPPER PART HEATED STORAGE VOLUME	
	DHW Volume	DHW exchanger surface	Max flowrate of sanitary water sustained from 10°C to 45°C with storage at 65°C and boiler on	Max sanitary water produced from 10°C to 45°C with storage at 65°C and boiler off	Max flowrate of sanitary water sustained from 10°C to 45°C with storage at 65°C and boiler on	Max sanitary water produced from 10°C to 45°C with storage at 65°C and boiler off
	[lt]	[m ²]	[lt/min]	[lt]	[lt/min]	[lt]
500	99	1,1	2,5	10 lt/min: 198 lt	1,57	10 lt/min: 148 lt
				25 lt/min: 176 lt		25 lt/min: 132 lt
600	146	1,3	3,0	10 lt/min: 239 lt	1,86	10 lt/min: 179 lt
				25 lt/min: 213 lt		25 lt/min: 160 lt
800	191	1,6	3,5	10 lt/min: 320 lt	2,17	10 lt/min: 240 lt
				25 lt/min: 280 lt		25 lt/min: 210 lt
1000	226	1,8	4,1	10 lt/min: 389 lt	2,26	10 lt/min: 291 lt
				25 lt/min: 330 lt		25 lt/min: 250 lt

UPPER HEAT EXCHANGERS TECHNICAL DATA


Output of the Combi 3 upper heat exchangers depending on the average DeltaT between primary and accumulation considering flow rate 3 m³/h)

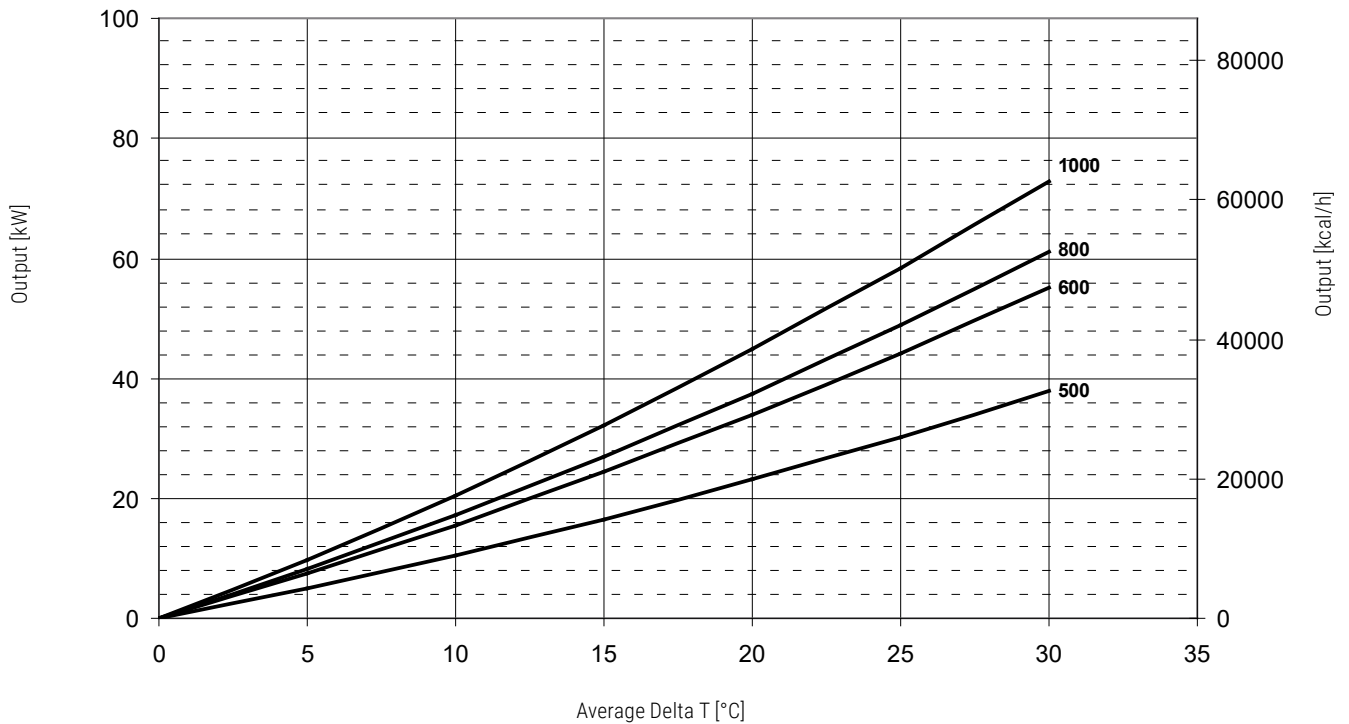

Please note: for LOWER heat exchangers see technical data of model Combi 2 INOX


COMBI 3 INOX

UPPER HEAT EXCHANGERS PRESSURE DROP

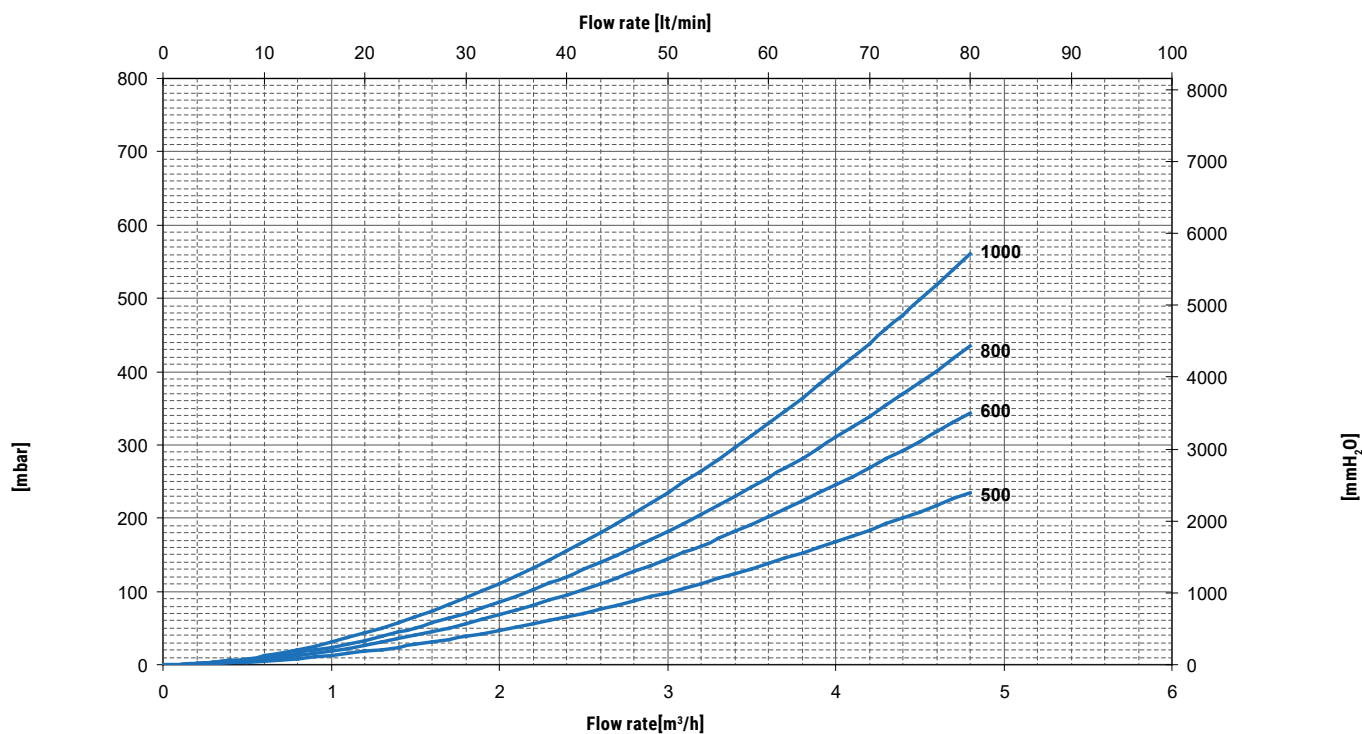

Please note: for LOWER heat exchangers see pressure drop of model Combi 2 INOX

EXAMPLE OF INSTALLATION WITH COMBI 3 INOX

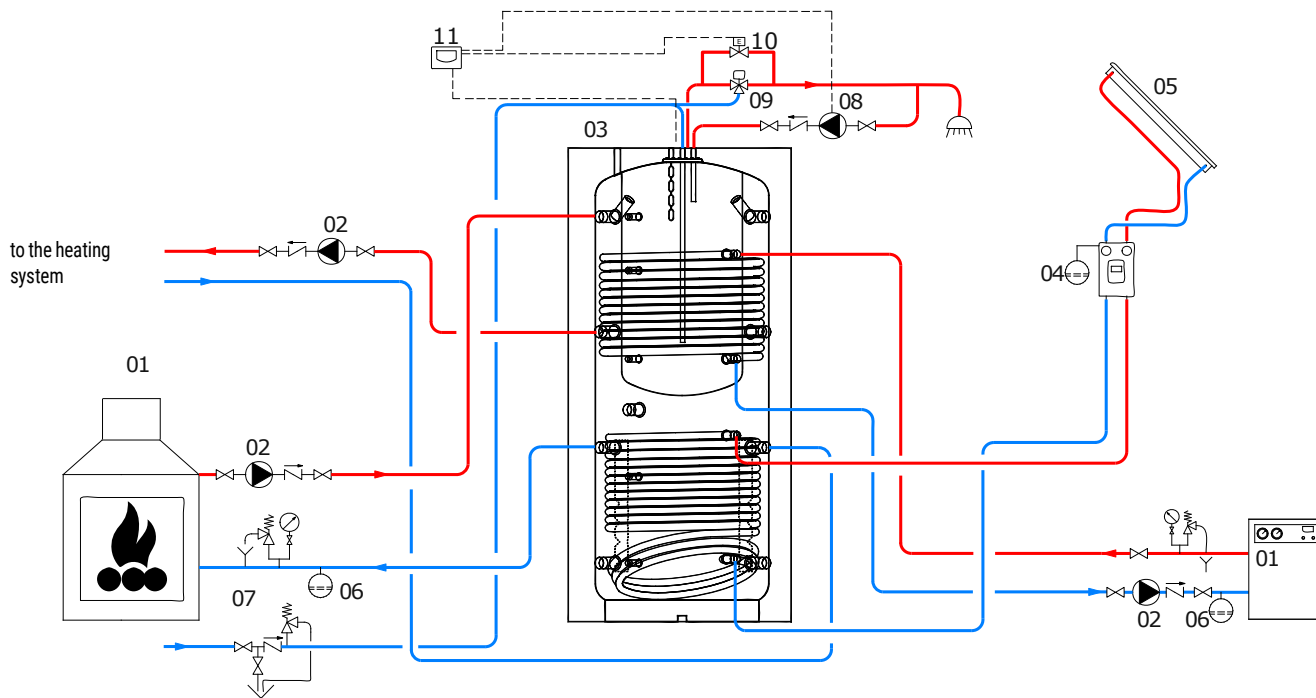

01	Generator	04	Solar system circulation group	07	Hydraulic safety group	10	By-pass solenoid valve
02	Heating system circulation group	05	Solar panels	08	D.H.W. recirculation group	11	Electronic Control/thermostat
03	COMBI 3	06	Expansion vessel	09	Thermostatic mixing valve		

The following schemes are purely illustrative. To realize the installation, always refer to a qualified technician.