



**CORDIVARI**<sup>®</sup>

LISA<sup>®</sup> 22 ELECTRIC  
FOR DOMOTIC CONTROL  
C A T A L O G U E

*New*

# LISA<sup>®</sup> 22

## ELECTRIC For domotic control



### FOR DOMOTIC CONTROL

- Electric heater without thermostat for external home automation control

*The radiator can only be used with a home automation management system or external thermostat equipped with weekly programming, open window sensor etc. compliant with EU Regulation 2015/1188.*

#### Material:

- Vertical collectors in painted mild steel semi oval 30x40 mm.
- Horizontal heating elements in painted mild steel  $\varnothing$  22 mm.
- Heat transfer fluid.

#### Fixing kit:

The fixing kit is in compliance with norm VDI 6036 that guarantees maximum resistance, security and stability of the towel rail. Each kit includes brackets, hexagonal tool, plugs and screws suitable for use on either compact or hollow brick walls. For a correct assembly always refer to the user manual supplied.



Electrical resistors: Class 1

Minimum ingress protection: IP 54

Power supply: 230Vac

Wire length: 1200 mm

#### Packing:

The radiator is protected by recyclable carton box. User notice included.

#### Painting process:

Painted with ecological epoxy powders. (Certificate DIN 55900-1,-2).

#### Colour:

Pure white RAL 9010

#### Electrical resistors:

Electric heater with chrome-plated cap and 1200 mm grey cable, and to be used in combination with an external home automation system.

### ACCESSORIES

*For accessories range see accessories chapter in comfort catalogue*



KIT 2 HOOKS  
WHITE COLOUR

Art. nr.

5991990310171









TOWEL BAR  
WHITE COLOUR  
Width= 370 mm

Art. nr.


5991990310170

*Applicable only for width  $\geq$  450 mm*

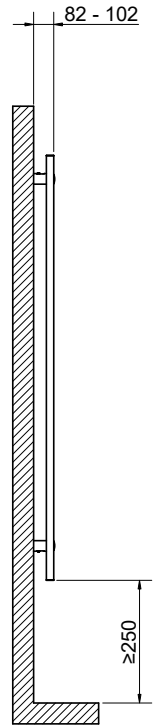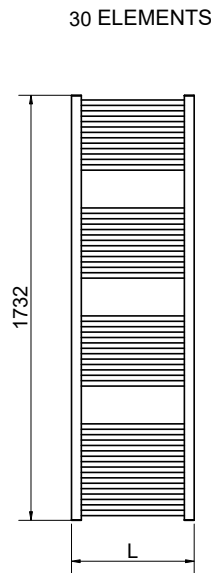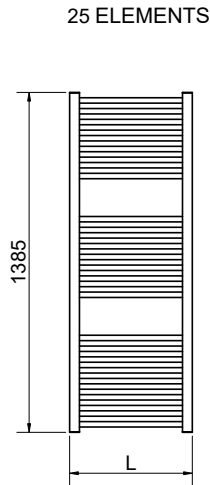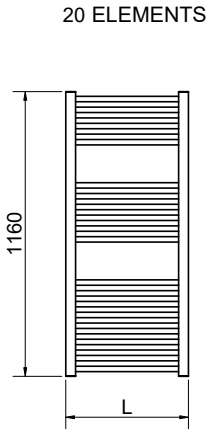

**NEW**

**ELECTRICAL HEATER  
WITHOUT PLUG**




Electric heater with chrome-plated cap and 1200 mm grey cable, for external home automation control

### LISA® 22 ELECTRIC - FOR DOMOTIC CONTROL

Height [mm]	Width L [mm]	Art. nr.	Output [Watt]	Weight [Kg]
<b>700</b>	400	3581646100090	300	7.0
	500	3581646100091	400	8.0
<b>1160</b>	400	3581646100092	400	11.0
	450	3581646100093	500	11.6
<b>1385</b>	500	3581646100094	600	12.2
	400	3581646100095	500	13.2
<b>1732</b>	500	3581646100096	700	15.2
	500	3581646100097	900	18.2

The radiator can only be used with a home automation management system or external thermostat equipped with weekly programming, open window sensor etc. compliant with EU Regulation 2015/1188.

### HOW TO PLACE ELECTRIC RADIATORS

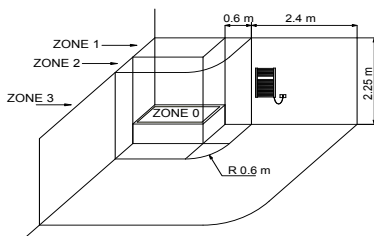

The national rules on installing electrical equipment in the bathroom must be scrupulously respected. The electric radiators must be always installed outside zone 1 and 2.

In particular the electric switch and control elements must be mandatorily located in zone 3, in order that no electrical control center is accessible to a anyone using the shower or bath.

# LISA<sup>®</sup> 22 BLACK

ELECTRIC For domotic control



## FOR DOMOTIC CONTROL

- Electric heater without thermostat for external home automation control

*The radiator can only be used with a home automation management system or external thermostat equipped with weekly programming, open window sensor etc. compliant with EU Regulation 2015/1188.*

### Material:

- Vertical collectors in painted mild steel semi oval 30x40 mm.
- Horizontal heating elements in painted mild steel  $\varnothing$  22 mm.
- Heat transfer fluid.

### Fixing kit:

The fixing kit is in compliance with norm VDI 6036 that guarantees maximum resistance, security and stability of the towel rail. Each kit includes brackets, hexagonal tool, plugs and screws suitable for use on either compact or hollow brick walls. For a correct assembly always refer to the user manual supplied.



Electrical resistors: Class 1

Minimum ingress protection: IP 54

Power supply: 230Vac

Wire length: 1200 mm

### Packing:

The radiator is protected by recyclable carton box. User notice included.

### Painting process:

Painted with ecological epoxy powders. (Certificate DIN 55900-1,-2).

### Colour:

T01 matt black

### Electrical resistors:

Electric heater with chrome-plated cap and 1200 mm grey cable, and to be used in combination with an external home automation system.

## ACCESSORIES

*For accessories range see accessories chapter in comfort catalogue*



KIT 2 HOOKS  
CHROMED







Art. nr. 5991990310303



TOWEL BAR  
CHROMED  
Width= 370 mm


Art. nr. 5991990310302

*Applicable only for width  $\geq$  450 mm*

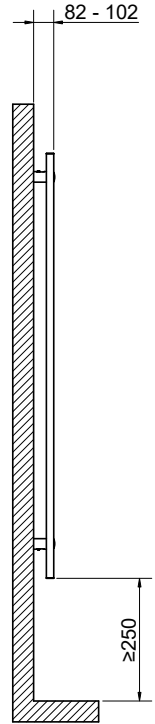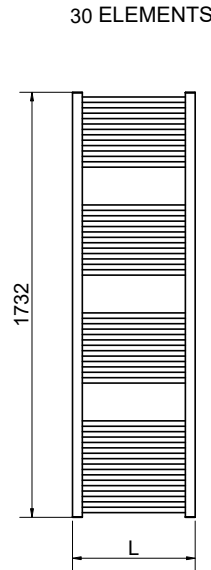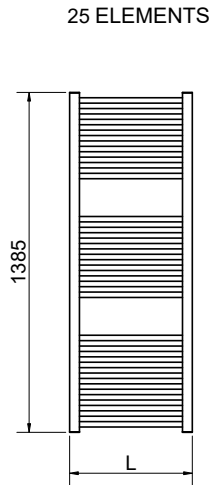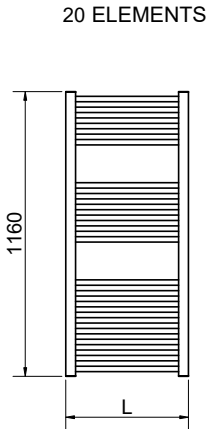

**NEW**

**ELECTRICAL HEATER  
WITHOUT PLUG**




Electric heater with chrome-plated cap and 1200 mm grey cable, for external home automation control

### LISA® 22 BLACK ELECTRIC - FOR DOMOTIC CONTROL

Height [mm]	Width L [mm]	Art. nr.	Output [Watt]	Weight [Kg]
<b>700</b>	400	3581646100160	300	7.0
	500	3581646100161	400	8.0
<b>1160</b>	400	3581646100162	400	11.0
	450	3581646100163	500	11.6
<b>1385</b>	500	3581646100164	600	12.2
	400	3581646100165	500	13.2
<b>1732</b>	500	3581646100166	700	15.2
	500	3581646100167	900	18.2

The radiator can only be used with a home automation management system or external thermostat equipped with weekly programming, open window sensor etc. compliant with EU Regulation 2015/1188.

### HOW TO PLACE ELECTRIC RADIATORS

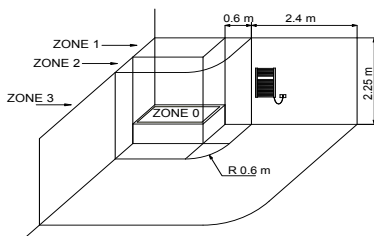

The national rules on installing electrical equipment in the bathroom must be scrupulously respected. The electric radiators must be always installed outside zone 1 and 2. In particular the electric switch and control elements must be mandatorily located in zone 3, in order that no electrical control center is accessible to a anyone using the shower or bath.

# LISA<sup>®</sup> 22

## CHROMED ELECTRIC For domotic control



### FOR DOMOTIC CONTROL

- Electric heater without thermostat for external home automation control

*The radiator can only be used with a home automation management system or external thermostat equipped with weekly programming, open window sensor etc. compliant with EU Regulation 2015/1188.*

#### Material:

- Vertical collectors in painted mild steel semi oval 30x40 mm.
- Horizontal heating elements in painted mild steel  $\varnothing$  22 mm.
- Heat transfer fluid.

#### Fixing kit:

The fixing kit is in compliance with norm VDI 6036 that guarantees maximum resistance, security and stability of the towel rail. Each kit includes brackets, hexagonal tool, plugs and screws suitable for use on either compact or hollow brick walls. For a correct assembly always refer to the user manual supplied.



Electrical resistors: Class 1

Minimum ingress protection: IP 54

Power supply: 230Vac

Wire length: 1200 mm

#### Packing:

The radiator is protected by recyclable carton box. User notice included.

#### Finishing:

Chrome (PLATED IN ITALY)

#### Electrical resistors:

Electric heater with chrome-plated cap and 1200 mm grey cable, and to be used in combination with an external home automation system.

### ACCESSORIES

*For accessories range see accessories chapter in comfort catalogue*



KIT 2 HOOKS  
CHROMED



Art. nr. 5991990310303



TOWEL BAR  
CHROMED  
Width= 370 mm


Art. nr. 5991990310302

*Applicable only for width  $\geq$  450 mm*

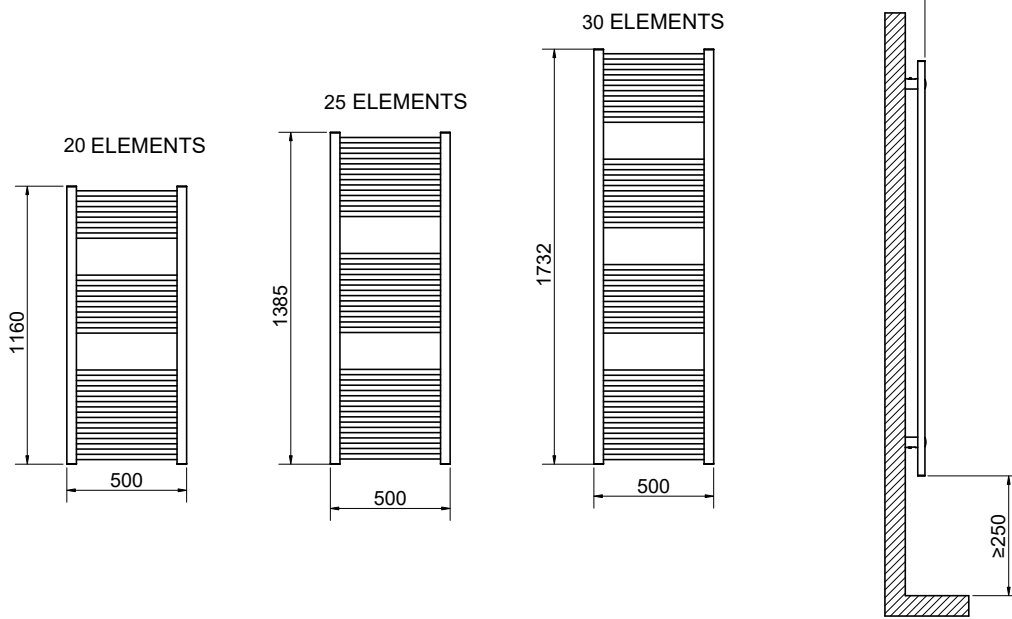

**NEW**

**ELECTRICAL HEATER  
WITHOUT PLUG**




Electric heater with chrome-plated cap and 1200 mm grey cable, for external home automation control

**LISA® 22 CHROMED ELECTRIC - FOR DOMOTIC CONTROL**

Height [mm]	Width L [mm]	Art. nr.	Output [Watt]	Weight [Kg]
<b>1160</b>	400	3581646110140	300	11.0
	450	3581646110141	300	11.6
	500	3581646110142	400	12.2
<b>1400</b>	400	3581646110143	400	13.2
	500	3581646110144	500	15.2
	550	3581646110145	500	15.8
<b>1732</b>	500	3581646110146	600	18.2

The radiator can only be used with a home automation management system or external thermostat equipped with weekly programming, open window sensor etc. compliant with EU Regulation 2015/1188.

**HOW TO PLACE ELECTRIC RADIATORS**

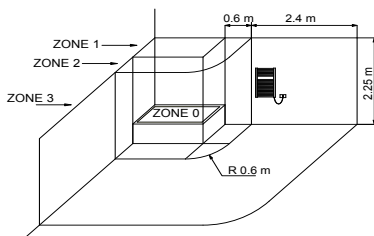

The national rules on installing electrical equipment in the bathroom must be scrupulously respected. The electric radiators must be always installed outside zone 1 and 2. In particular the electric switch and control elements must be mandatorily located in zone 3, in order that no electrical control center is accessible to a anyone using the shower or bath.



FOLLOW US



[www.cordivari.com](http://www.cordivari.com)

**CORDIVARI** SRL

Z. I. Pagliare 64020 Morro D'Oro (TE) • Italy | C.F.-P.IVA-VAT Id nr. IT00735570673 | Capitale Sociale Euro 10.000.000,00 i.v  
Tel: +39 085 80.40.714 | Fax: +39 085 80.41.273 | [export@cordivari.it](mailto:export@cordivari.it) | [www.cordivari.com](http://www.cordivari.com) | UNI EN ISO 9001 | UNI EN ISO 14001

