

LISA[®] 22 ELECTRIC

FOR DOMOTIC CONTROL WHITE



Color: **R02 RAL 9016 TRAFFIC WHITE**
with **CABLE COVER** accessory

MATERIAL:

- 30x40 mm semi oval vertical collectors in painted mild steel.
- ø 22 mm horizontal heating elements in painted mild steel.
- Heat transfer fluid.

FIXING KIT:

Brackets, hex key, airvent, dowels and screws suitable for use on solid walls or perforated bricks, assembly instructions.
The fixing kit is compliant with VDI 6036 norm, class 4.

PACKING:

Cardboard angular and profiles protected by a recyclable film in polyethylene.

User notice included.

PAINTING PROCESS:

Painted with ecological epoxy powders.
Certificate DIN 55900-1,-2.

COLORS:

R01-RAL 9010 WHITE and **R02-RAL 9016 TRAFFIC WHITE**.

ELECTRICAL RESISTORS:

Electric heater with white-plated cap and 1200 mm white cable, to be used in combination with an external home automation system.

FOR DOMOTIC CONTROL

- Electric heater without thermostat for external home automation control

CERTIFICATIONS



ACCESSORIES

For Accessories range see ACCESSORIES CHAPTER




**Total Color
Kristal Valve**




**Kit 2 Hooks
White - R01**

For information about Kristal valves, see **RADIATORS AND TOWEL RAILS CATALOGUE**


Art. nr. 5991990310171




13 ELEMENTS






20 ELEMENTS



25 ELEMENTS

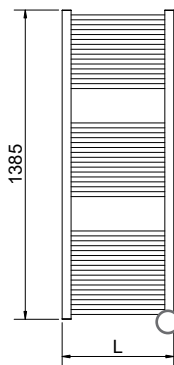

30 ELEMENTS

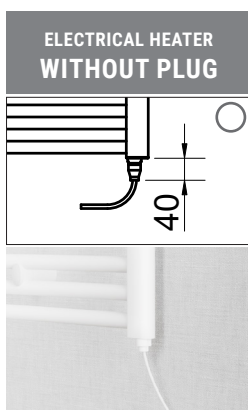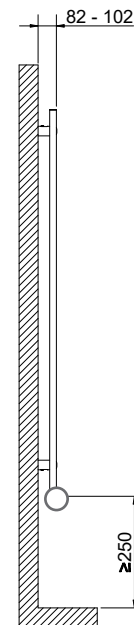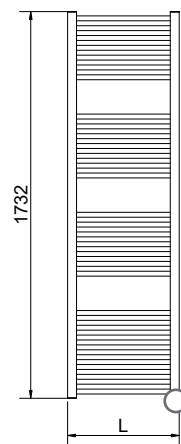



LISA® 22 ELECTRIC FOR DOMOTIC CONTROL

Height	Width	Art. nr.	Art. nr.	Output	Weight
[mm]	L [mm]	White R01 RAL 9010	Traffic White R02 RAL 9016	[Watt]	[Kg]
700	400	3581646100090	3581646100100	300	7,0
	500	3581646100091	3581646100101	400	8,0
1160	400	3581646100092	3581646100102	400	11,0
	450	3581646100093	3581646100103	500	11,6
1385	500	3581646100094	3581646100104	600	12,2
	400	3581646100095	3581646100105	500	13,2
1732	500	3581646100096	3581646100106	700	15,2
	500	3581646100097	3581646100107	900	18,2

The radiator can only be used with a home automation management system or external thermostat equipped with weekly programming, open window sensor etc. compliant with EU Regulation 2024/1103.

NEW


CABLE COVER



KIT CABLE COVER - WHITE

Height	Art. nr.	Art. nr.
[mm]	White R01 RAL 9010	Traffic White R02 RAL 9016
52	5102000310001	5102000310004

Cordivari ErP electric radiators are characterised by high efficiency. These models comply with EU Regulation 2024/1103. The seasonal energy efficiency of these fixed electric space heating appliances, with nominal Thermal output >250 W, is over 46% in all models. Each of the ErP electric radiators is equipped with at least electronic temperature control, window opening detection, weekly programming and stand-by power consumption <0.5 W (or 2.0 W in Wi-Fi mode, where applicable).

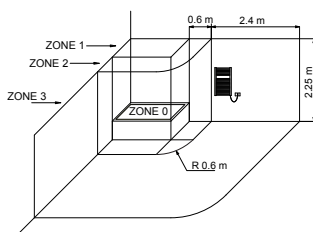

HOW TO PLACE ELECTRIC RADIATORS

The national rules on installing electrical equipment in the bathroom must be scrupulously respected. The electric radiators must be always installed outside zone 1 and 2.

In particular the electric switch and control elements must be mandatorily located in zone 3, in order that no electrical control center is accessible to anyone using the shower or bath.