

# KELLY 5010 ELITE

WARRANTY 5 YEARS



NEW



Color: T23 Powder

## FEATURES

P. max: 5 bar

T. max: 110°C

Functioning: hot water

Connections: n° 2 x 1/2" G - 2 x 1/2" G

## MATERIAL:

- Ø 38 mm collectors in painted mild steel.
- 50x10 mm horizontal heating elements in painted mild steel.

## FIXING KIT:

Brackets, hex key, airvent, dowels and screws suitable for use on solid walls or perforated bricks, assembly instructions.  
The fixing kit is compliant with VDI 6036 norm, class 4.

## PACKAGING:

The radiator is protected by recyclable cardboard box. User notice included.

## PAINTING PROCESS:

Painted with ecological epoxy powders (Certificate DIN 55900-1,-2).

## COLORS:

See color chart.

## ACCESSORIES INCLUDED:

Kelly 5010 Elite is supplied with:

- 2 hooks
  - Kristal valve kit with ø12/14mm copper and ø 16mm multilayer fittings
  - Kristal TC thermostatic head and pipe cover kit
- All matching the radiator color.

## CERTIFICATES



HOT WATER HEATING RADIATORS,  
CONVECTORS AND RADIANT MOUNTED  
CEILING PANELS - NF 647

## AVAILABLE FUNCTIONS

- Hot water
- Dual energy

## ACCESSORIES INCLUDED



Colored valve kit, complete with fittings  
for copper ø 12-14 and multilayer ø 16 connection,  
TC thermostatic head and pipe cover kit




Kit 2 colored hooks









Colored fixing kit

Complete list, codes and details of the ACCESSORIES




Detail of the 50 mm pipe-centres version.

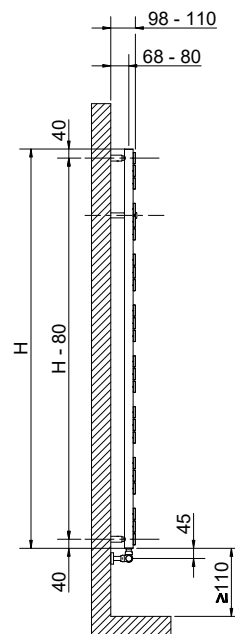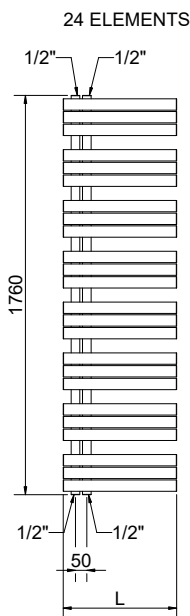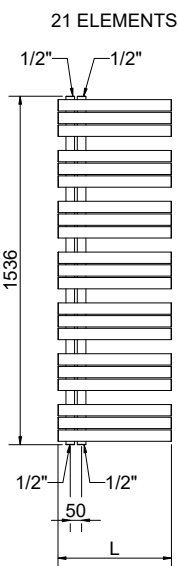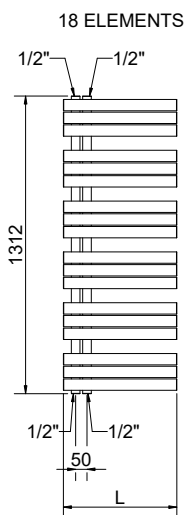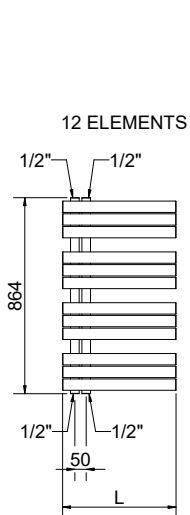


## KELLY 5010 ELITE DX

Height	Width	Art. nr.	Surface	Water content	Thermal output		Exp.	Dual energy kit
					$\Delta t$ 50°C	$\Delta t$ 30°C		
[mm]	L [mm]	R01 White	[m <sup>2</sup> ]	[lt]	[Watt]	[Watt]	n	[Watt]
<b>864</b>	500	3551726100066	0,87	3,9	<b>381</b>	204	1,2243	400
	600	3551726100070	1,01	4,3	<b>443</b>	234	1,2536	400
<b>1312</b>	500	3551726100067	1,31	5,8	<b>563</b>	300	1,2351	500
	600	3551726100071	1,51	6,5	<b>637</b>	336	1,2533	600
<b>1536</b>	500	3551726100068	1,53	6,8	<b>652</b>	341	1,2695	600
	600	3551726100072	1,77	7,6	<b>742</b>	388	1,2696	700
<b>1760</b>	500	3551726100069	1,75	7,8	<b>728</b>	378	1,2837	700
	600	3551726100073	2,02	8,7	<b>875</b>	455	1,2781	900



## KELLY 5010 ELITE SX

Height	Width	Art. nr.	Surface	Water content	Thermal output		Exp.	Dual energy kit
					$\Delta t$ 50°C	$\Delta t$ 30°C		
[mm]	L [mm]	R01 White	[m <sup>2</sup> ]	[lt]	[Watt]	[Watt]	n	[Watt]
<b>864</b>	500	3551726100074	0,87	3,9	<b>381</b>	204	1,2243	400
	600	3551726100078	1,01	4,3	<b>443</b>	234	1,2536	400
<b>1312</b>	500	3551726100075	1,31	5,8	<b>563</b>	300	1,2351	500
	600	3551726100079	1,51	6,5	<b>637</b>	336	1,2533	600
<b>1536</b>	500	3551726100076	1,53	6,8	<b>652</b>	341	1,2695	600
	600	3551726100080	1,77	7,6	<b>742</b>	388	1,2696	700
<b>1760</b>	500	3551726100077	1,75	7,8	<b>728</b>	378	1,2837	700
	600	3551726100081	2,02	8,7	<b>875</b>	455	1,2781	900



To order **Kelly 5010 Elite** you just need to choose size and color

The codes shown in the table refer to the R01 White color models

For output at different  $\Delta T$ , please refer to the following formula: **desired output = output at  $\Delta T$  50 x (Desired  $\Delta T$ /50)<sup>n</sup>**