

LISA[®] 25 BLACK

 5 YEARS WARRANTY

NEW



Color: **T01 MATT BLACK**

MATERIAL:

- 30x40 mm semi oval collectors in painted mild steel.
- ø 25 mm horizontal heating elements in painted mild steel.

FIXING KIT:

Brackets, hex key, airvent, dowels and screws suitable for use on solid walls or perforated bricks, assembly instructions.
The fixing kit is compliant with VDI 6036 norm, class 4.

PACKING:

Cardboard angular and profiles protected by a recyclable film in polyethylene. User notice included.

PAINTING PROCESS:

Painted with ecological epoxy powders. Certificate DIN 55900-1,-2.

COLOR:

T01 MATT BLACK.

AVAILABLE FUNCTIONS

- Hot water
- Dual energy

FEATURES

Max pressure: 8 bar	Max temperature: 110°C
Functioning: Hot water	Connections: n° 2 da 1/2" G - 1 da 1/2" G

CERTIFICATIONS



ACCESSORIES

For Accessories range see ACCESSORIES CHAPTER



**Total Color
Kristal Valve**

For information about Kristal valves, see RADIATORS AND TOWEL RAILS CATALOGUE



**Towel Bar
Black -T01**
Width= 370 mm


Applicable only for width ≥ 450 mm

Art. nr. 5991990310718




**Kit 2 Hooks
Black -T01**

Art. nr. 5991990310717



Detail of the 50 mm pipe centres version.

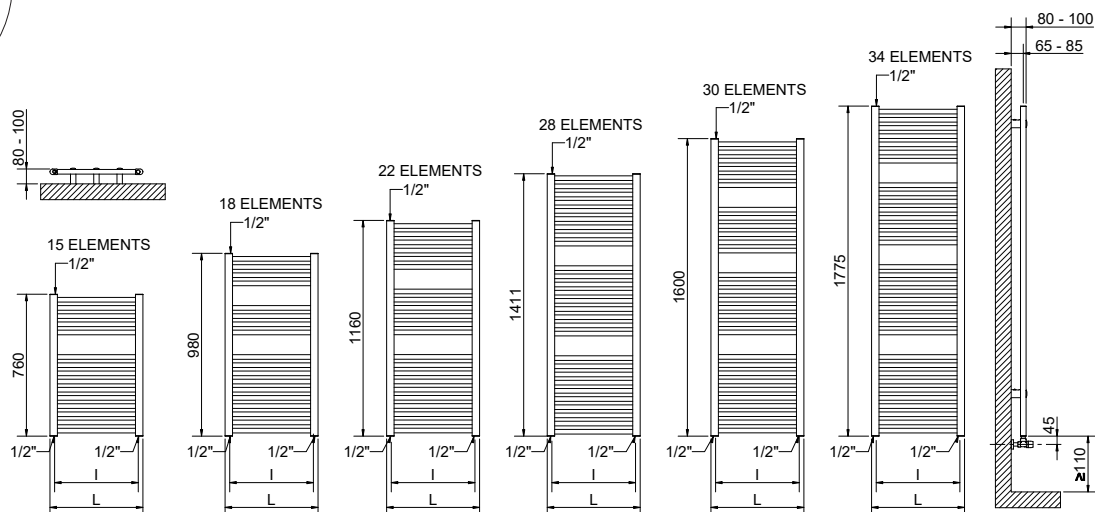

LISA® 25 BLACK

PIPE CENTRES 50 mm

Thermal output

Height [mm]	Width L [mm]	Pipe Centres l [mm]	Art. nr.		Dry weight [Kg]	Surface [m²]	Water content [lt]	Thermal output		Dual energy kit [Watt]	
			Matt Black T01	Matt Black T01				Δt 50°C [Watt]	Δt 30°C [Watt]		
760	400	350	3551580005508	3551580005550	5,1	0,57	3,4	317	170	1,2169	300
	450	400	3551580005509	3551580005551	5,6	0,62	3,7	348	186	1,2179	300
	500	450	3551580005510	3551580005552	6,0	0,68	4,0	379	203	1,2189	400
	550	500	3551580005511	3551580005553	6,4	0,74	4,3	410	219	1,2199	400
	600	550	3551580005512	3551580005554	6,9	0,80	4,6	441	236	1,2208	400
	750	700	3551580005513	3551580005555	8,2	0,98	5,6	534	285	1,2238	500
	1000	950	3551580005514	3551580005556	10,4	1,27	7,1	712	380	1,2287	700
980	400	350	3551580005515	3551580005557	6,3	0,70	4,2	388	207	1,2299	400
	450	400	3551580005516	3551580005558	6,8	0,77	4,6	427	227	1,2298	400
	500	450	3551580005517	3551580005559	7,4	0,84	4,9	466	248	1,2297	400
	550	500	3551580005518	3551580005560	7,9	0,91	5,3	505	269	1,2295	500
	600	550	3551580005519	3551580005561	8,4	0,98	5,7	543	289	1,2294	500
	750	700	3551580005520	3551580005562	10,0	1,19	6,8	660	352	1,2290	600
	1000	950	3551580005521	3551580005563	12,7	1,55	8,7	880	469	1,2283	900
1160	400	350	3551580005522	3551580005564	7,6	0,84	5,1	449	238	1,2404	400
	450	400	3551580005523	3551580005565	8,2	0,93	5,5	494	262	1,2393	500
	500	450	3551580005524	3551580005566	8,9	1,02	6,0	539	286	1,2383	500
	550	500	3551580005525	3551580005567	9,5	1,10	6,4	585	310	1,2373	600
	600	550	3551580005526	3551580005568	10,2	1,19	6,9	630	335	1,2362	600
	750	700	3551580005527	3551580005569	12,1	1,45	8,3	766	408	1,2331	700
	1000	950	3551580005528	3551580005570	15,4	1,88	10,5	1021	545	1,2279	1000
1411	400	350	3551580005529	3551580005571	9,4	1,00	6,3	541	286	1,2427	500
	450	400	3551580005530	3551580005572	10,2	1,09	6,9	596	316	1,2420	600
	500	450	3551580005531	3551580005573	11,1	1,27	7,5	651	345	1,2413	600
	550	500	3551580005532	3551580005574	11,9	1,38	8,1	706	374	1,2406	700
	600	550	3551580005533	3551580005575	12,7	1,49	8,6	762	404	1,2399	700
	750	700	3551580005534	3551580005576	15,2	1,82	10,4	927	492	1,2378	600
	1000	950	3551580005535	3551580005577	19,3	2,37	13,3	1236	657	1,2343	1200
1600	400	350	3551580005536	3551580005578	10,3	1,60	6,9	615	325	1,2445	600
	450	400	3551580005537	3551580005579	11,2	1,27	7,6	679	359	1,2440	700
	500	450	3551580005538	3551580005580	12,1	1,39	8,2	742	393	1,2436	700
	550	500	3551580005539	3551580005581	13,0	1,51	8,8	805	426	1,2431	700
	600	550	3551580005540	3551580005582	13,9	1,63	9,4	869	460	1,2427	900
	750	700	3551580005541	3551580005583	16,5	1,98	11,3	1058	561	1,2414	1000
	1000	950	3551580005542	3551580005584	21,0	2,57	14,4	1411	749	1,2392	1200
1775	400	350	3551580005543	3551580005585	11,6	1,30	7,8	691	363	1,2591	700
	450	400	3551580005544	3551580005586	12,6	1,43	8,5	761	400	1,2577	700
	500	450	3551580005545	3551580005587	13,6	1,57	9,2	832	437	1,2564	700
	550	500	3551580005546	3551580005588	14,6	1,71	9,9	903	475	1,2550	900
	600	550	3551580005547	3551580005589	15,6	1,83	10,6	974	513	1,2537	1000
	750	700	3551580005548	3551580005590	18,6	2,24	12,7	1187	626	1,2496	1200
	1000	950	3551580005549	3551580005591	23,6	2,90	16,3	1583	839	1,2428	1200

For output at different Δt than 50°C, please refer to the following formula: desired output = output at Δt 50°C x (desired Δt/50)ⁿ